
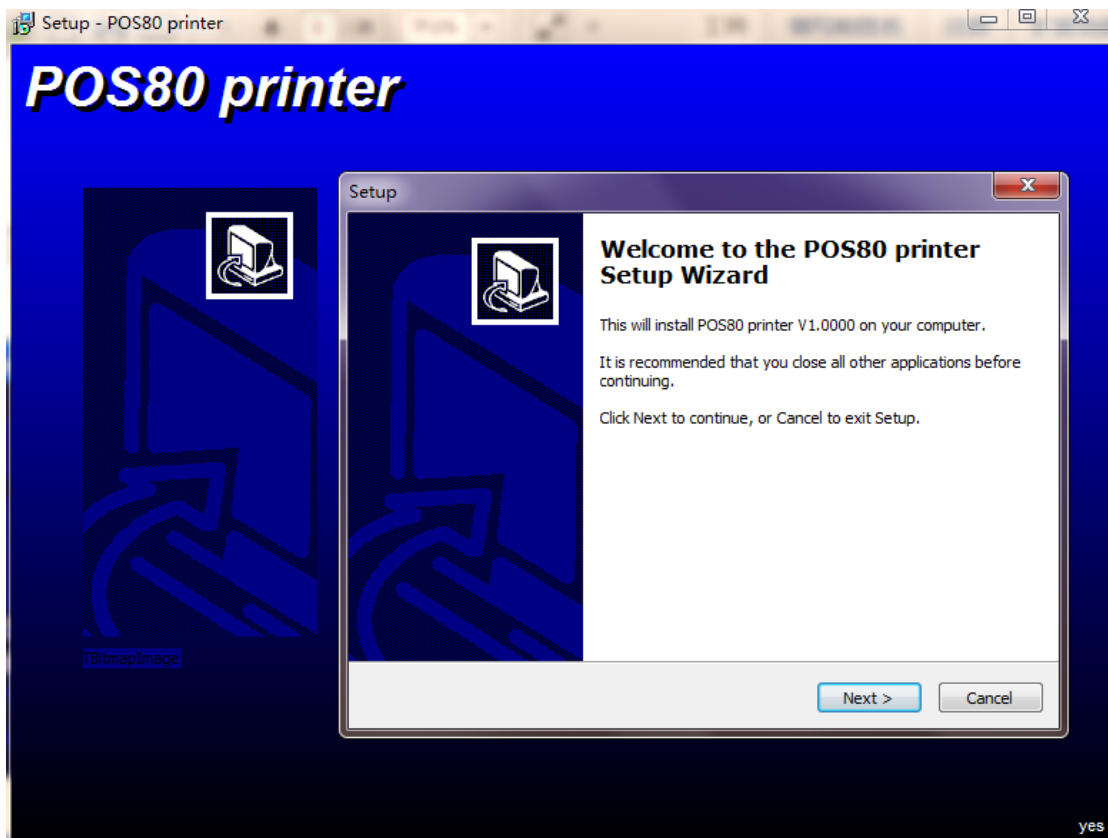




Printer Driver User Guide

1. How to install the Printer Driver


(1) Run the  POS80 printer.exe on the disk .Following the steps(see the pricture):




(2)Click “Next” (The picture as following).

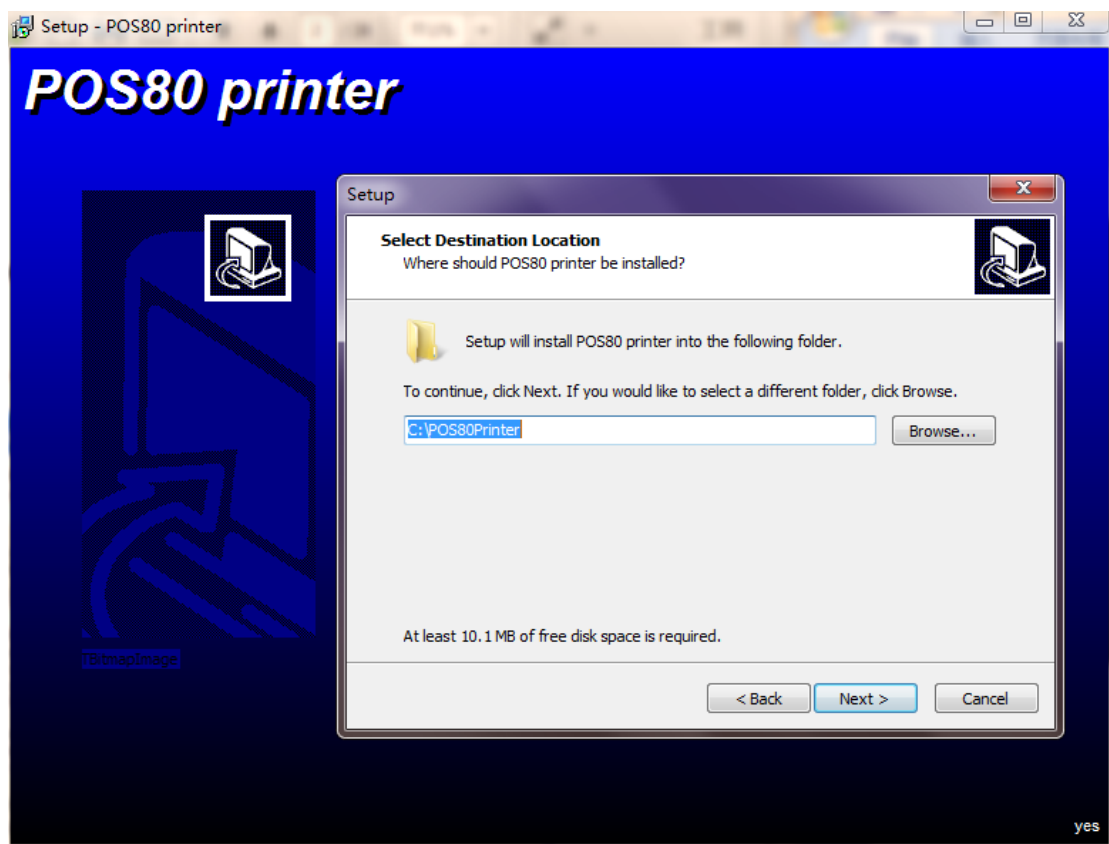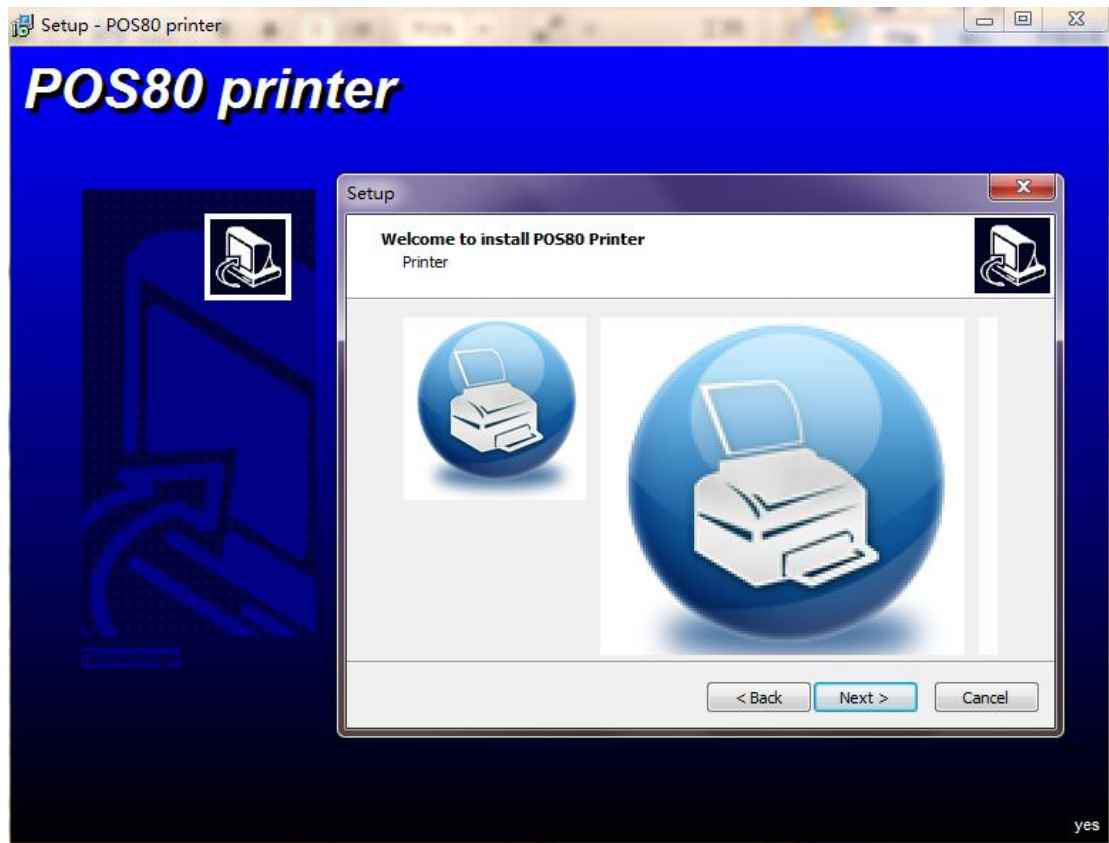


(3) click "Install" (The picture as bellow).

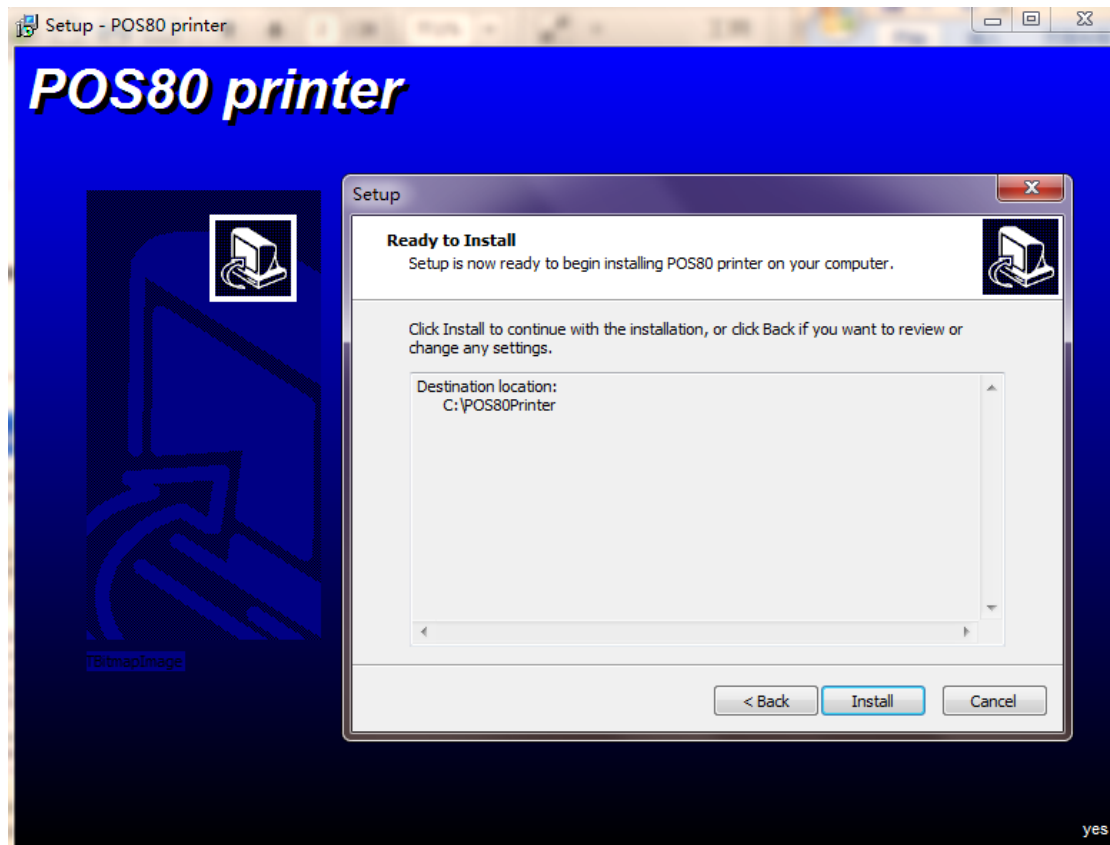

(4) Click “Install” (see the following picture).

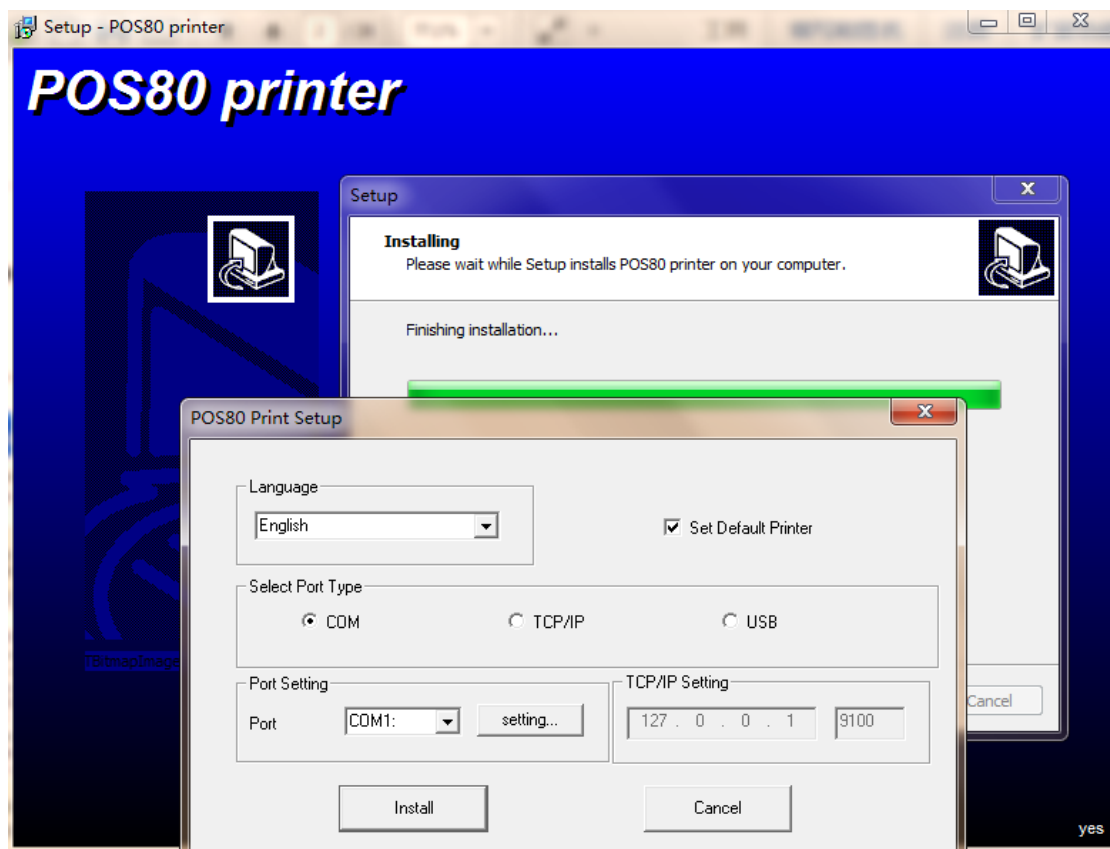


(5) Click “Finish” , and the printer driver is installed on your computer.

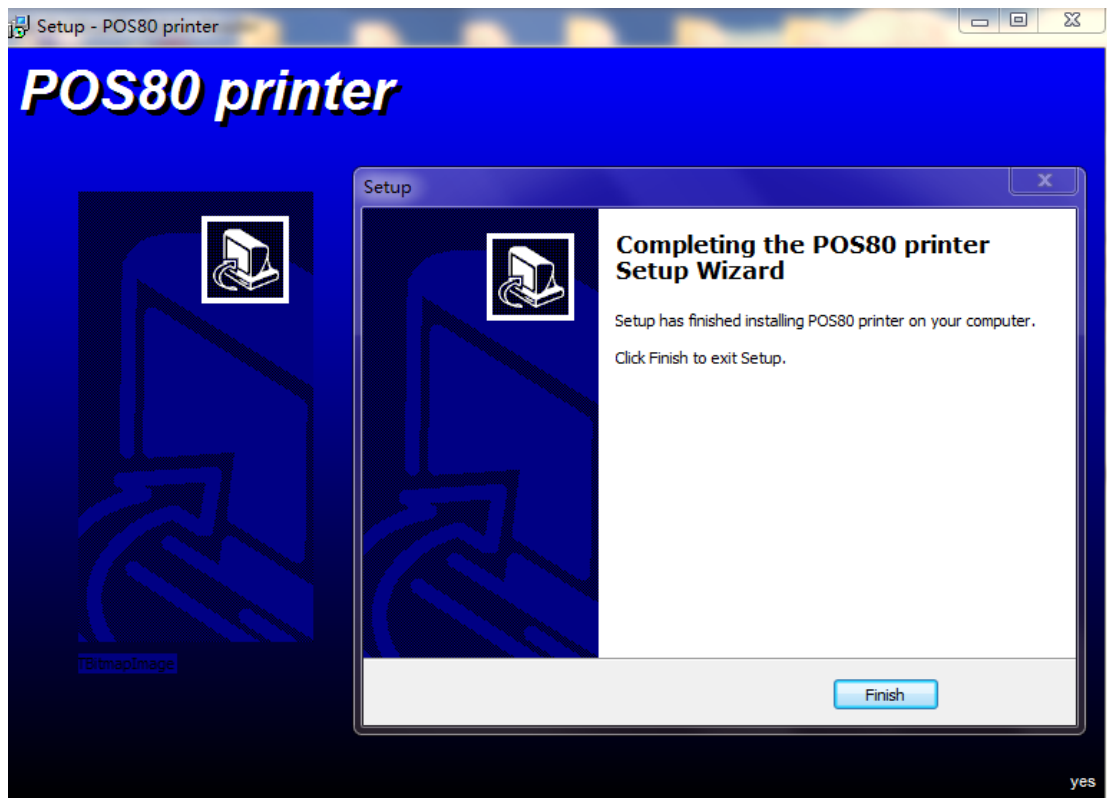


2. How to test the communication port with Printer Driver


(1)After installed Printer driver, follow the steps.

1. “Start”→ “Settings”→ “printers and faxes” → “POS80 Printer” → “Properties” (see the following picture).

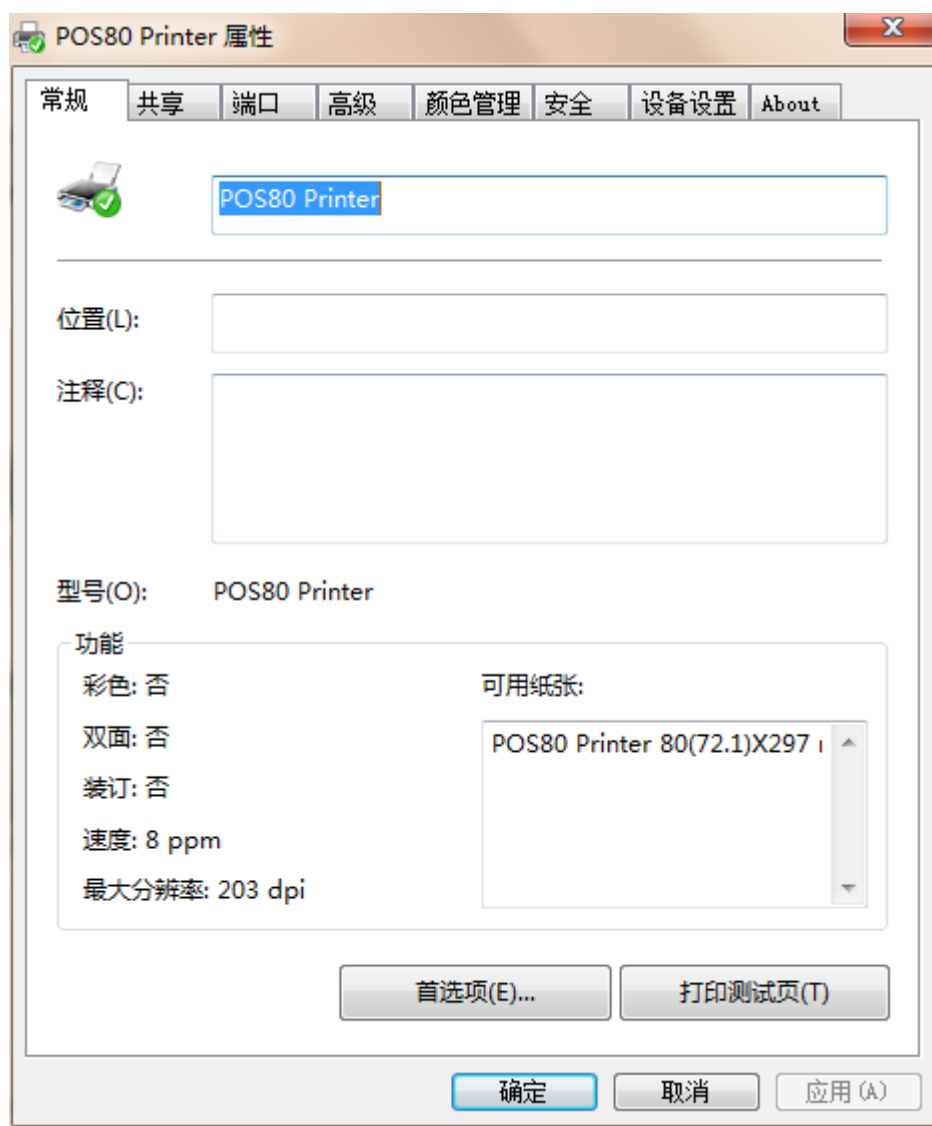

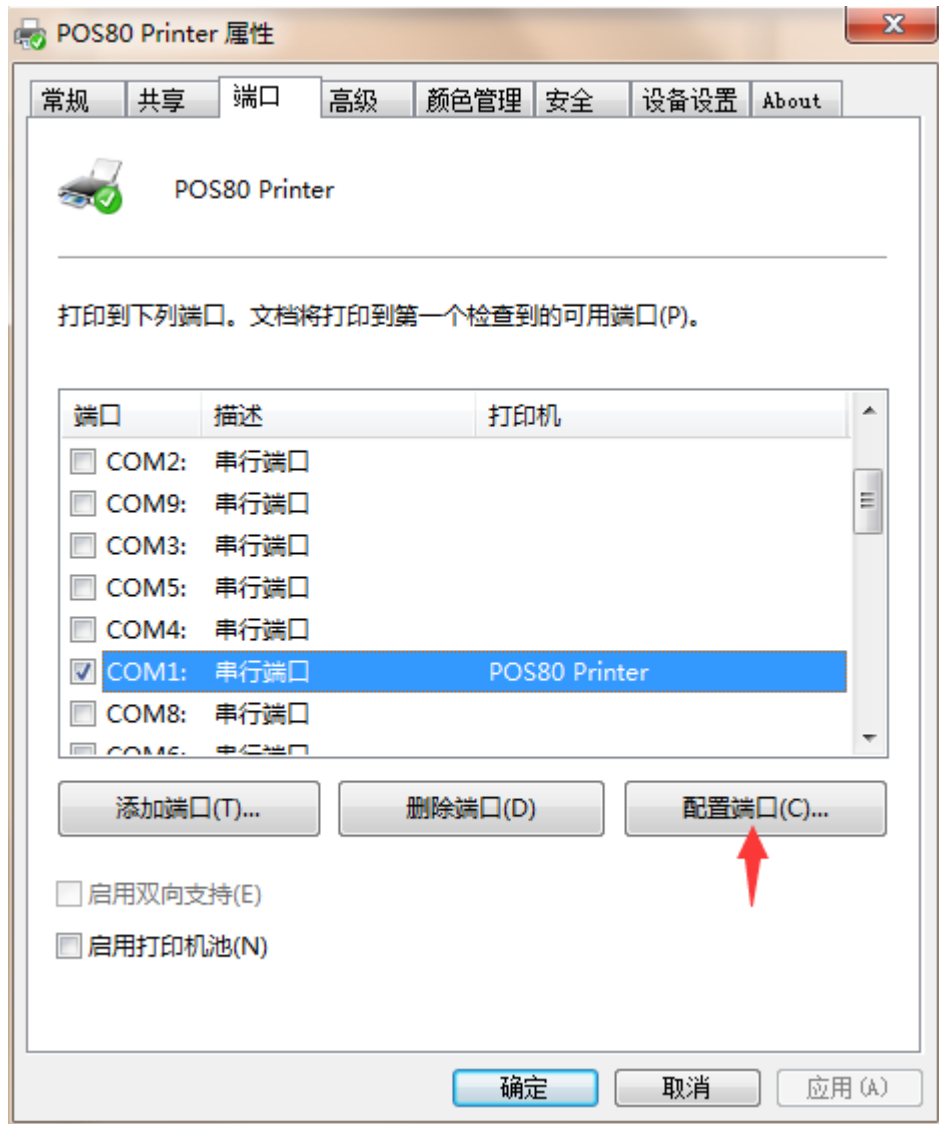

(2) Choose the corresponding serial port.
 For example "com1:Serial Port", then click "Configure Port", to setup the serial port, Bits per second must be the same with the baud rate of the printer. Click "OK" and finish the setting of the serial communication port (see the following picture).

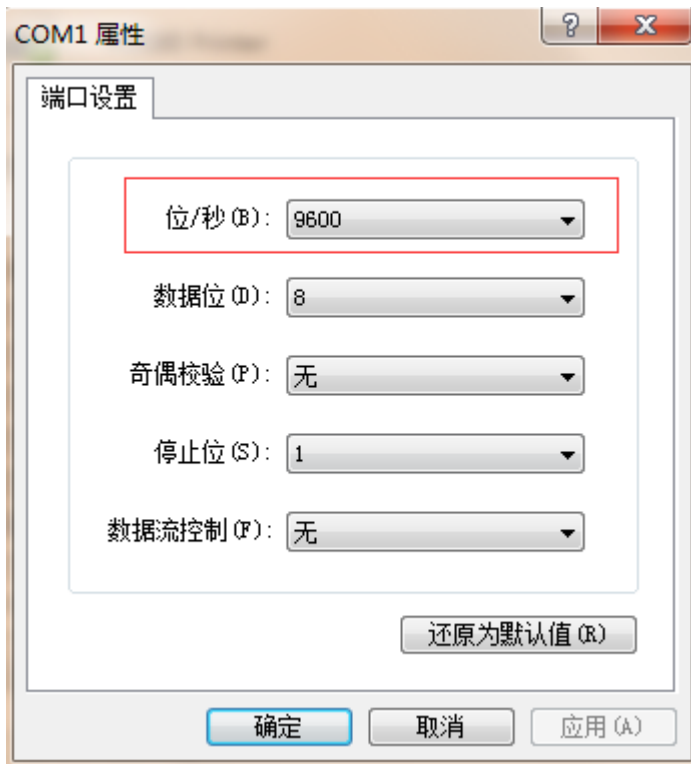


(3) Click “Print Test Page”. If the printer can print test page normally, and please confirmed the printer and computer are properly set it shows this communication port is working.



3. Test with USB communication port for the print test page


1. Choose “USB…Virtual printer port”, then click “Apply” (see the following picture).

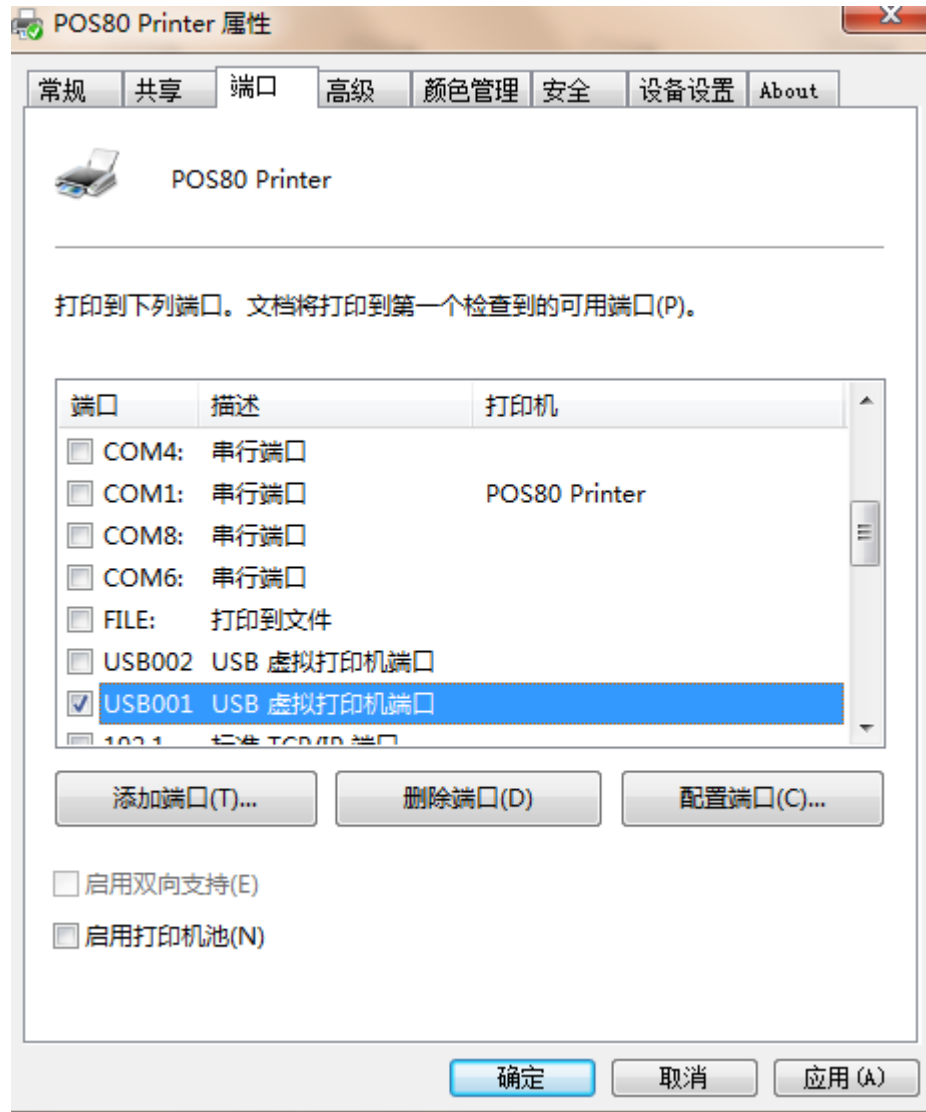


2. Click “Print Test Page”. If the printer can print test page normally, and please confirmed the printer and computer are properly set it shows this communication port is working.

4. Test with Ethernet/LAN communication port for the print test page

(1). Click the “Add Port...” in the printer attribute(see the following picture).

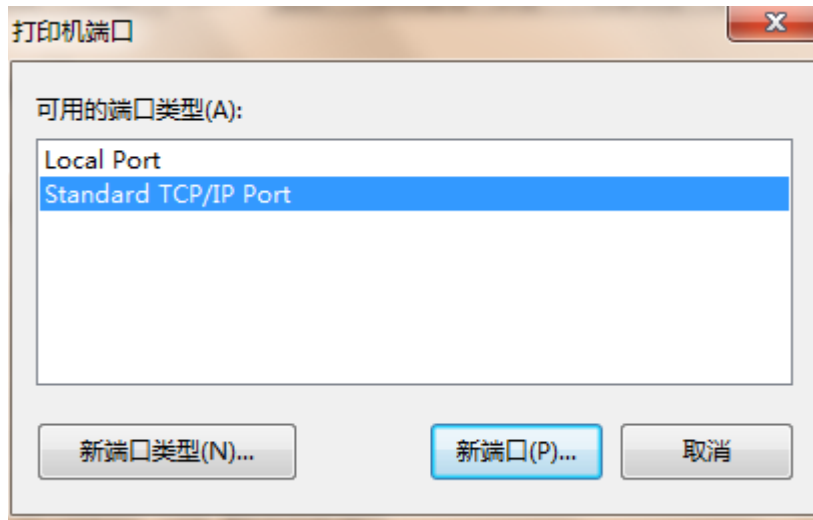

(2)Then choose “New Port” (see the following picture).

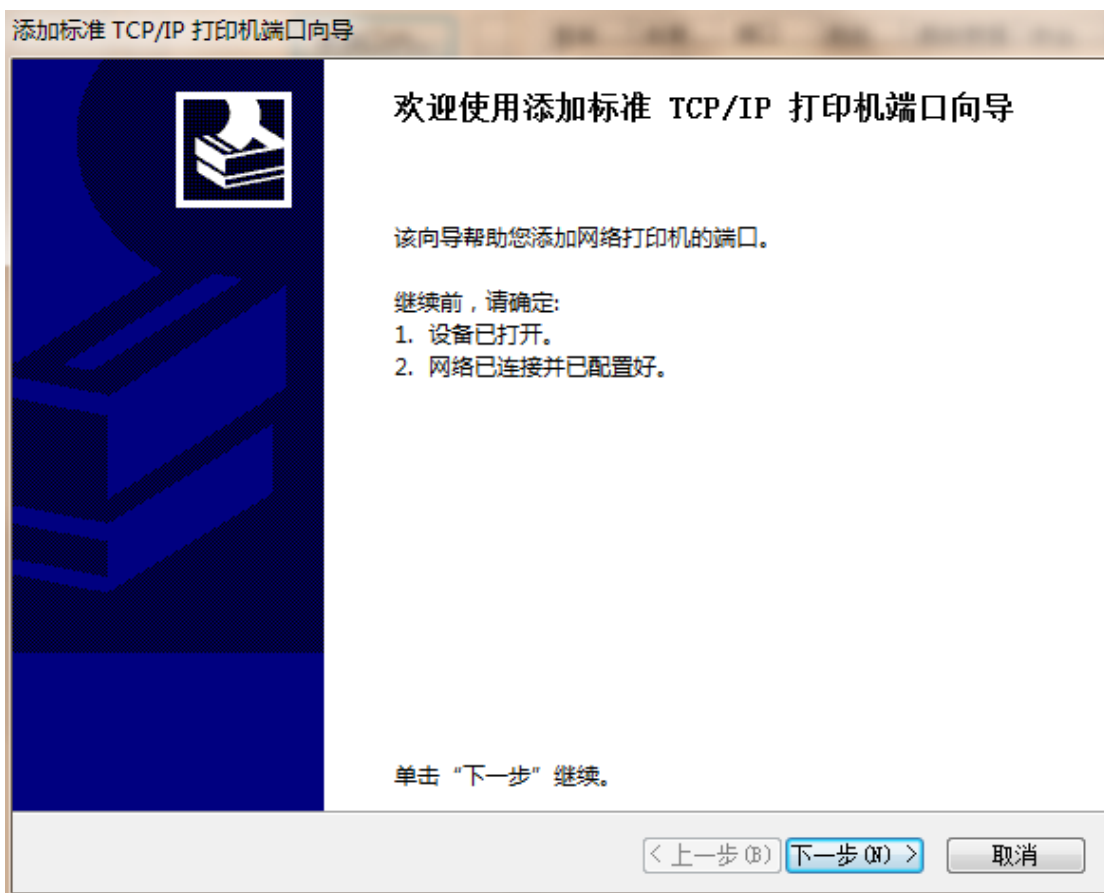

(3)Click “Next” (see the following picture)

添加标准 TCP/IP 打印机端口向导

添加端口
您想为哪一设备添加端口?

输入打印机名或 IP 地址，以及设备的端口名。

打印机名或 IP 地址(A):

端口名(P):

< 上一步(B) 下一步(N) > 取消

(4) Enter “192.168.1.87” in “Printer Name or IP Address”. (This address is our factory default IP address). After Click “Next” (see the following picture).

添加标准 TCP/IP 打印机端口向导

需要额外端口信息
不能识别设备。

网络上没有找到设备。请确定:

1. 设备已打开。
2. 网络已连上。
3. 设备配置正确。
4. 前一页上的地址正确。

如果您认为地址不正确，请单击“上一步”返回到上一页，然后改正地址并在网络上执行另一次搜索。如果您认为地址是正确的，请选择下面的设备类型。

设备类型


☒ 标准(S) Generic Network Card

☐ 自定义(C) 设置(E)...

< 上一步(B) 下一步(N) > 取消



(5) Click “Finish”, TCP/IP standard printing communication port is added completely.

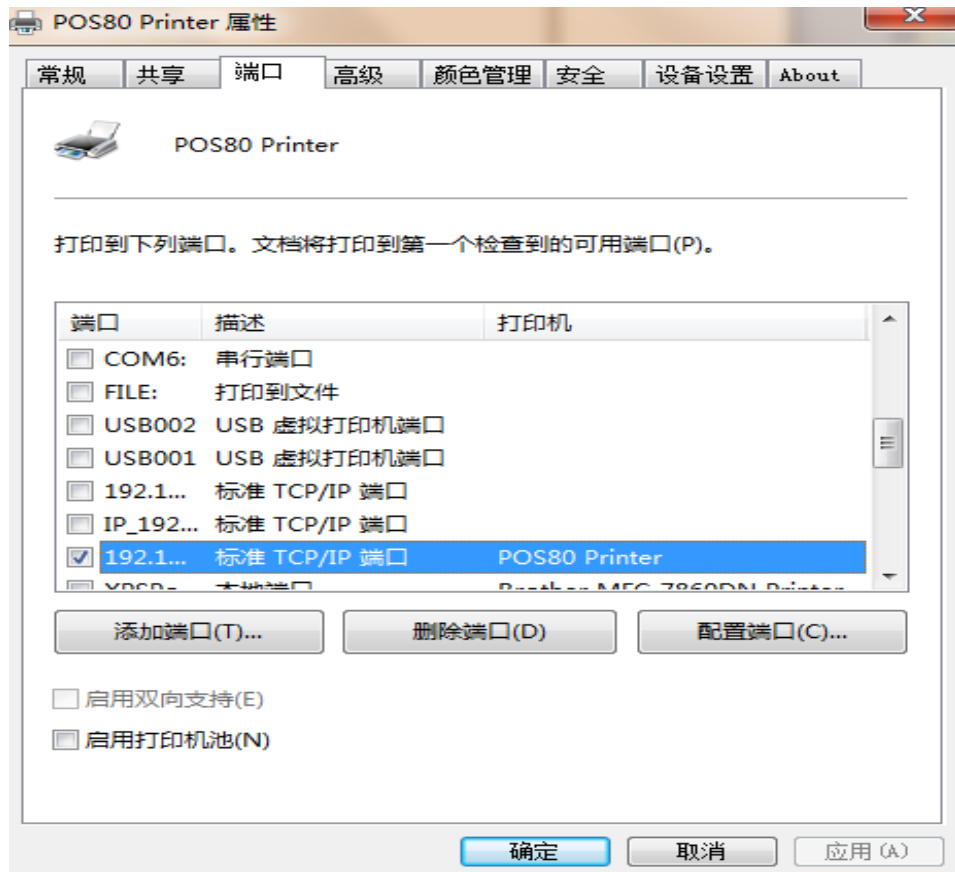

(6) Click “IP- Standard TCP/IP Port”, and click “Apply”. Next click “General”, then click “Print Test Page”. If the printer can print test page normally, and please confirmed the printer and computer are properly set it shows this communication port is working.

